



HD Series

Cold Water Pressure Washers

North America's #1 Brand of High-Pressure Cleaning Equipment

Gasoline / Modular Design Belt or Direct Drive Models

Durable weld free, corrosion resistant **aluminum frame**

Durable VRT3 **unloader** with bypass loop diverts water flow when trigger gun is not activated

Low profile **handle** is easy to push and pull

Five, high-pressure **stainless steel nozzles**: 0°, 15°, 25°, 40° and a detergent nozzle

Fatigue-free spring-loaded **trigger gun** with spray wand and side handle making for easy point-and-shoot cleaning action

Reliable **Honda GX** commercial-duty gasoline engines with 3-year warranty

Heavy-duty Triplex pump comes with 7-year warranty

Flat free tires are puncture proof and ready to roll when you need them

Downstream detergent injection allows remote detergent injection

Electric start models include battery

50 ft. wire-braided hose includes guards, couplers and swivels at both ends

FEATURES

- 3 to 4 GPM / 2700 to 4100 PSI
- 6.5-13 HP Honda engines
- Honda gasoline engines
- Recoil or electric-start gas-engine models

Modular design for easy transition between cart and skid style

www.Hotsy.com

Nothing Cleans Like a Hotsy!

HD SERIES Cold Water Models

■ 6.5-13 HP Honda engines ■ 3 to 4 GPM @ 2700 to 4100 PSI ■ Compact / modular design ■ 7-yr Hotsy pump warranty

The Hotsy HD Series: Modular Pressure Washers Offering Powerful Cold-Water Cleaning


SPECIFICATIONS

MODEL	GPM	PSI	CC's (HP)	ENGINE	START	PUMP MODEL	DRIVE	HOSE	DIMENSIONS	SHIP WT (lbs)
HD 3.0/27 G	3.0	2700	196 (6.5)	Honda GX200	RECOIL	LP3035	DIRECT	50'	41"Lx22"Wx24"H	112
HD 3.5/35 G	3.5	3500	270 (9)	Honda GX270	RECOIL	LP3535G.1	DIRECT	50'	41"Lx22"Wx24"H	130
HD 4.0/40 G	4.0	4000	389 (13)	Honda GX390	RECOIL	LS4040G.3	DIRECT	50'	43"Lx26"Wx27"H	149
HD 4.0/40 Ge*	4.0	4000	389 (13)	Honda GX390	ELECTRIC	LS4040G.3	DIRECT	50'	43"Lx26"Wx27"H	158
HD 3.0/27 GB	3.0	2700	196 (6.5)	Honda GX200	RECOIL	LP3035G	BELT	50'	41"Lx22"Wx24"H	123
HD 3.5/35 GB	3.5	3500	270 (9)	Honda GX270	RECOIL	LM3540R.3	BELT	50'	41"Lx22"Wx24"H	156
HD 4.0/40 GB	4.0	4000	389 (13)	Honda GX390	RECOIL	LM3840R.3	BELT	50'	43"Lx26"Wx27"H	160
HD 4.0/40 GeB*	4.0	4000	389 (13)	Honda GX390	ELECTRIC	LM3840R.3	BELT	50'	43"Lx26"Wx27"H	196


*Battery included

OPTIONS FOR THE HD SERIE

Select HD pressure washers can be mounted on one of the following skids for mobile cleaning anywhere. Fits within a standard UTV / ATV bed or truck.*

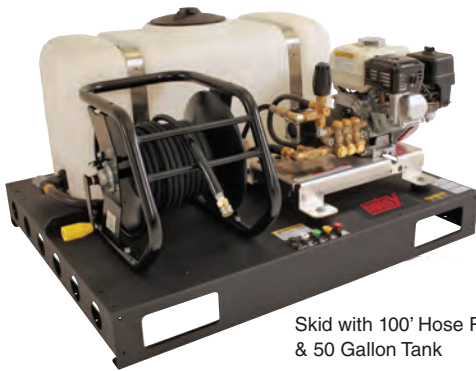

Skid with 100' Hose Reel & 50 Gallon Tank

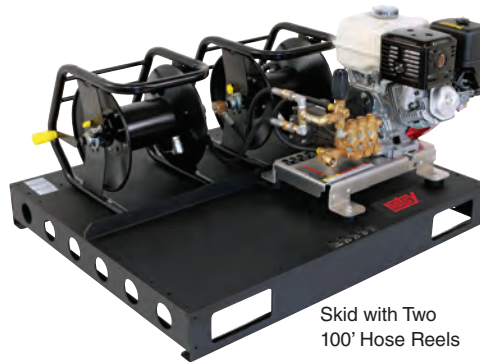

Skid with Two 100' Hose Reels

Dimensions 40" L x 48" W x 35" H

*Skids compatible with the following models:

- HD 3.0/27 G
- HD 3.5/35 G
- HD 4.0/40 G

Additional options available:

- Skid Mount Feet
- Pallet Skid
- Hose Storage
- Hose Reel
- 37.5" Handle
- Gun Storage

SERVICE & REPAIR

Hotsy has factory-trained service technicians who will provide on-site maintenance for your cleaning equipment. Our techs have most common replacement parts on their service truck, and will quickly have your washer running smoothly.



FIND OUT MORE ONLINE: HOTSY.COM

DON'T FORGET THE SOAP!

Hotsy pressure washers clean best when matched with specially formulated Hotsy detergents. Nearly all contain Hotsy's exclusive advanced-formula HCC additives to help prevent scale build-up and to fight corrosion in your equipment. All are highly concentrated, so a little goes a long way.



hotsy *Nothing Cleans Like a Hotsy!*

Tel: (800) 525-1976 Fax: (888) 880-9631
www.Hotsy.com email: info@Hotsy.com
P/N HOT_HDSG Effective 03/19



Specifications & product descriptions subject to change without notice. Hotsy's manufacturing facilities have established and apply a quality and environmental management system to be ISO 9001:2008 and ISO 14001:2001 certified.

A member of KÄRCHER North America

©2019 Hotsy

NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We meet the CETA testing specs for machine performance at $\pm 10\%$ and in some cases are tighter within $\pm 5\%$ of listed specifications.

Distributed by: